



# SPECIFICATIONS

## Limitorque MX and L120 Series

Motor Performance Data  
for MX and L120 Electric Actuators

FCD LMENPS2331-00 – 01/07 (Replaces 130-50001)

## Product Specifications

0	5.20		
20	4.40	0.16	
.20	7.60	0.2	
.20	7.60	0.	
	7.60	0	

# Contents

Valve actuator control characteristics	3
Standard motor design summary	5
Power supply cable sizing	5
Limitorque valve actuator motor performance data	6
MX actuators	7
208 volts, three-phase, 60 Hz (-22°F to 158°F) (-30°C to 70°C)	7
230 volts, three-phase, 60 Hz (-22°F to 158°F) (-30°C to 70°C)	8
380 volts, three-phase, 50 Hz (-22°F to 158°F) (-30°C to 70°C)	9
380 volts, three-phase, 60 Hz (-22°F to 158°F) (-30°C to 70°C)	11
400 volts, three-phase, 50 Hz (-22°F to 158°F) (-30°C to 70°C)	13
415 volts, three-phase, 50 Hz (-22°F to 158°F) (-30°C to 70°C)	15
460 volts, three-phase, 60 Hz (-22°F to 158°F) (-30°C to 70°C)	17
575 volts, three-phase, 60 Hz (-22°F to 158°F) (-30°C to 70°C)	19
MX actuators – low-temperature applications	21
380 volts, three-phase, 50 Hz	21
380 volts, three-phase, 60 Hz	23
400 volts, three-phase, 50 Hz	25
415 volts, three-phase, 50 Hz	27
460 volts, three-phase, 60 Hz	29
575 volts, three-phase, 60 Hz	31
L120 actuators	33
208 volts, three-phase, 60 Hz	33
230 volts, three-phase, 60 Hz	34
416 volts, three-phase, 60 Hz	35
460 volts, three-phase, 60 Hz	36
575 volts, three-phase, 60 Hz	37
380 volts, three-phase, 50 Hz	38
400 volts, three-phase, 50 Hz	39
415 volts, three-phase, 50 Hz	40
115 volts, single-phase, 60 Hz 230 volts, single-phase, 60 Hz 220 volts, single-phase, 50 Hz	41

## Valve actuator control characteristics

The selection of valve actuator motors, motor protection devices, motor controls, and cabling requires an understanding of valve performance characteristics. Three characteristics that define valve requirements are:

- High starting torque
- Precise position control
- Intermittent operation

### High starting torque

Figures 1 and 2 illustrate typical valve performance by plotting motor load (torque) as a function of valve travel. From these figures it can be observed that the highest motor torque requirement occurs when the valve is in the closed position. The dynamic torque required to move the valve through most of its travel is substantially lower. This high torque at the closed position can be largely attributed to the engagement/disengagement of the valve seal.

The actual characteristic of the application can modify these basic curves. For instance, high-flow butterfly valves will exhibit an increased dynamic load. However, this is typically a transient condition and does not alter the basic criteria for motor selection.

Figure 1: Typical Gate Valve Characteristics


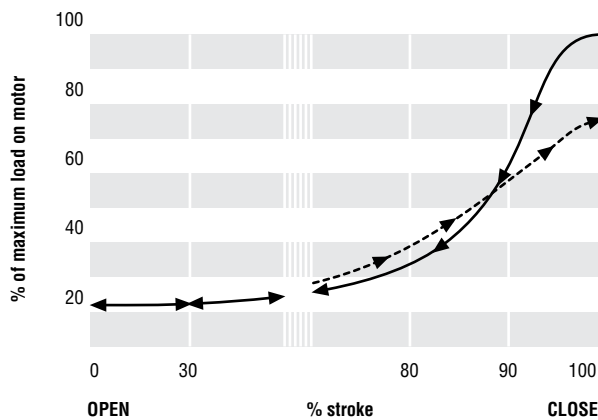


Figure 2: Typical Plug, Ball, and Low-flow Butterfly Valve Characteristics

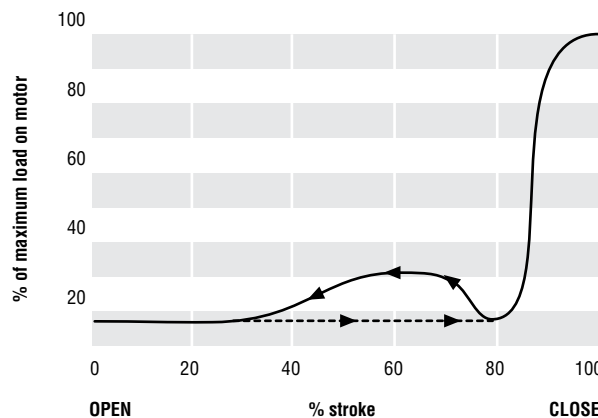


## Precise position control

Electric valve actuators automatically de-energize the motor to control valve position and output torque. The final valve position or torque is therefore largely dependent on motor inertia. Motors that are too large for the valve will have too much inertia for the application. It will be difficult to regulate the final valve position or torque as illustrated in **Figure 3**.

Inertia can be minimized by selecting a motor with a minimum frame size that is large enough to generate sufficient starting torque. The running torque requirements are relatively low as explained above. Limitorque has found that the best combination of motor frame sizes results in a 15-minute run time rating.


Figure 3: Effect of Motor Inertia

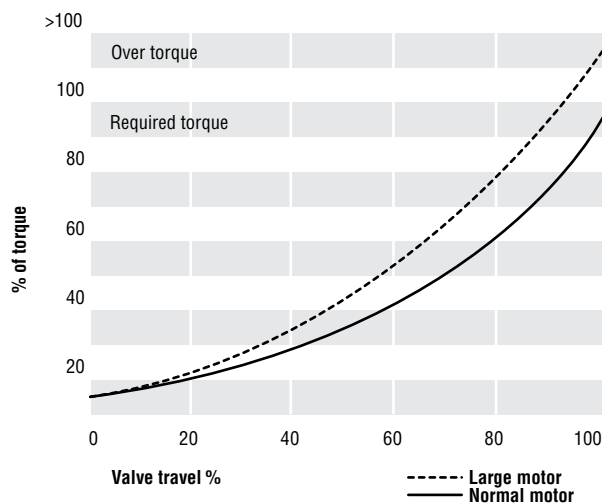

## Intermittent operation

Valves used in blocking or positioning service are infrequently operated and valve stroke times are normally limited to a few minutes. **Figure 4** illustrates the thermal characteristics of a typical valve actuator motor and shows that the 15-minute run time rating is adequate for most valves. Exceptions include large, slowly operated valves or those requiring frequent operation. These applications are accommodated by special actuator selection considerations.

Figure 4: Typical Motor Temperature Rise Characteristics of Limitorque Valve Actuator Motors

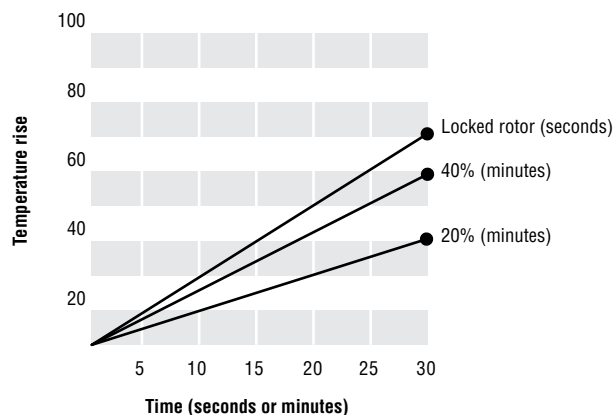

## Other considerations

- Thermal protection – The use of Class F insulation and embedded thermal sensors provides motor protection from high ambient temperature, high starting torque, and potential motor overload.
- Enclosure – Actuator motor designs are TENV (Totally Enclosed Non-ventilated) to protect against environmental extremes. All enclosures are suitable for NEMA 4 and 6 (IP – 67 and 68) service and can be XP (explosionproof) if required.

## Characteristics of other valve types

Sluice gates and guillotine dampers are examples of valves that require a continuous high running torque as opposed to the types previously discussed. The torque requirement for sluice gate and guillotine damper valves are application-dependent, and the data given in the accompanying tables may not be suitable for their selection. Please consult Limitorque for application assistance in the selection of actuators for these valves.

## Standard motor design summary

- High starting torque – greater than the unseating torque requirement
- Running torque – 20% of the unseating torque
- Low inertia
- Run time rating – 15 minutes
- Totally enclosed frame design
- Class F insulation
- Embedded thermal protection

## Power supply cable sizing

The voltage at the actuator terminals must be maintained to within 10% of the rated value for the motor to develop the specified torque. This is particularly important under starting and seating conditions that apply when beginning the opening or unseating phases. Assuming that the mains provide the rated voltage, this means that no more than 10% of the supply voltage can be dropped by the cable, connections, and any intervening protection or disconnect devices when the motor is drawing locked-rotor current.

## Disconnect switch and overload protection

The rating of disconnect switches and motor overload protection devices is generally subject to national or local regulations, which should always be followed.

## Limitorque valve actuator motor performance data

This bulletin contains data for L120 and MX series valve actuators. The terms used in these tables are defined below:

- **Actuator speed** – the output speed of the actuator in revolutions per minute (RPM) when the motor is delivering its rated torque.
- **Rated torque** – for valve actuator applications, this is typically the torque required by the actuator when the valve is moving and is defined as 20% of nominal rotor torque. For rated torque loads greater than 20%, please contact Limitorque.
- **Full-load current** – the current drawn by the motor when it is delivering rated torque.
- **Locked-rotor current** – the steady-state current drawn by the motor when the rotor is stationary and rated voltage and frequency are applied. This is the current required by the actuator when the valve is unseating.
- **Rated motor speed** – the motor speed required to produce the rated output speed of the actuator.
- **hp (horsepower)** – the power (expressed in horsepower) produced by the actuator motor when it is running at rated speed and delivering rated torque.
- **kW (kilowatts)** – the power (expressed in kilowatts) produced by the actuator motor when it is running at rated speed and delivering rated torque (1 kW = 1.34 hp).
- **Efficiency** – the ratio of the output power delivered to the actuator to the input power of the motor when the actuator is operating at rated speed and torque. Efficiency is expressed as a percent – (output power/input power) X 100.
- **Power factor** – the power factor is kW delivered to motor divided by kVA delivered to motor.
- **Service factor** – the service factor of an AC motor is a multiplier which, when applied to the rated horsepower, indicates a permissible horsepower loading that may be carried under the conditions specified for the service factor.

## Standard power supplies

Motor performance data is grouped according to the type of power source required by the actuator. The following table lists the power sources for standard motors. Motors can also be provided for any other voltage by special design. Please contact Limitorque if your application requires other power source capabilities.

Table 1: Standard Power Supplies (volts)

Single-Phase 50 Hz	Single-Phase 60 Hz	Three-Phase 50 Hz	Three-Phase 60 Hz
220	115	380	208
	230	400	230
		415	380
			460
			575

*NOTE: The standard torque ratings quoted by Limitorque are valid for supply voltage reductions up to 10% below the stated value. Typically, over voltage is permitted to +10% of nominal nameplate values. Please contact Limitorque if the supply voltage is expected to fall below 90% or rise above 110% of the nominal (stated) value.*

## MX actuators

208 volts<sup>1</sup>, three-phase, 60 Hz (-22°F to 158°F) (-30°C to 70°C)

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>2</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>2</sup> (%)	Power Factor at Full Load <sup>2</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-05</b>	18	6	1.6	4.2	0.13	0.10	44	0.37	0.78	3.0
	26	4	1.4	4.3	0.16	0.12	54	0.46	0.84	2.5
	40	4	1.8	6.4	0.26	0.19	59	0.50	0.87	4.0
	52	4	1.8	6.4	0.26	0.19	59	0.50	0.87	4.0
	77	4	1.8	6.4	0.26	0.19	59	0.50	0.87	4.0
	100	4	1.8	10.7	0.26	0.19	59	0.50	0.87	4.0
	155	2	2.1	10.7	0.42	0.31	60	0.59	0.91	3.25
	200	2	2.1	10.7	0.42	0.31	60	0.59	0.91	3.25
<b>MX-10</b>	18	6	4.3	11.0	0.31	0.23	46	0.42	0.75	7.0
	26	4	4.0	11.5	0.37	0.28	57	0.52	0.85	5.7
	40	4	4.4	16.2	0.59	0.44	63	0.52	0.81	9.0
	52	4	4.4	16.2	0.59	0.44	63	0.52	0.81	9.0
	77	4	4.4	16.2	0.59	0.44	63	0.52	0.81	9.0
	100	4	4.4	16.2	0.59	0.44	63	0.52	0.81	9.0
	155	2	3.4	22.6	0.91	0.68	80	0.76	0.85	7.0
	200	2	3.4	22.6	0.91	0.68	80	0.76	0.85	7.0
<b>MX-20</b>	18	6	6.9	18.1	0.57	0.43	57	0.52	0.79	13.0
	26	4	4.3	19.9	0.66	0.50	62	0.72	0.74	10.0
	40	4	7.6	27.5	0.99	0.75	67	0.58	0.79	15.0
	52	4	7.6	27.5	0.99	0.75	67	0.58	0.79	15.0
	77	4	7.6	27.5	0.99	0.75	67	0.58	0.79	15.0
	100	4	7.6	27.5	0.99	0.75	67	0.58	0.79	15.0
	155	2	5.7	34.0	1.40	1.04	81	0.74	0.84	11.0
	200	2	5.7	34.0	1.40	1.04	81	0.74	0.84	11.0
<b>MX-40</b>	18	6	10.8	37.0	1.10	0.82	63	0.40	0.91	25.0
	26	4	7.40	39.0	1.30	0.97	70	0.65	0.81	20.0
	40	4	15.0	59.5	1.90	1.42	71	0.63	0.87	29.0
	52	4	15.0	59.5	1.90	1.42	71	0.63	0.87	29.0
	77	4	15.0	59.5	1.90	1.42	71	0.63	0.87	29.0
	100	4	15.0	59.5	1.90	1.42	71	0.63	0.87	29.0
	155	2	11.1	75.0	3.00	2.24	80	0.78	0.78	23.0
	200	2	11.1	75.0	3.00	2.24	80	0.78	0.78	23.0

Note 1: 208 volt not available in MX-85 and MX-140.

Note 2: Full load is defined as 20% of rated motor torque.

## MX actuators

230 volts<sup>1</sup>, three-phase, 60 Hz (-22°F to 158°F) (-30°C to 70°C)

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>2</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>2</sup> (%)	Power Factor at Full Load <sup>2</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-05</b>	18	6	1.6	4.2	0.13	0.10	44	0.37	0.78	3.0
	26	4	1.4	4.3	0.16	0.12	54	0.46	0.84	2.5
	40	4	1.8	6.4	0.26	0.19	59	0.50	0.87	4.0
	52	4	1.8	6.4	0.26	0.19	59	0.50	0.87	4.0
	77	4	1.8	6.4	0.26	0.19	59	0.50	0.87	4.0
	100	4	1.8	6.4	0.26	0.19	59	0.50	0.87	4.0
	155	2	2.1	10.7	0.42	0.31	60	0.59	0.91	3.25
200	2	2.1	10.7	0.42	0.31	60	0.59	0.91	3.25	
<b>MX-10</b>	18	6	4.3	11.0	0.31	0.23	46	0.42	0.75	7.0
	26	4	4.0	11.5	0.37	0.28	57	0.52	0.85	5.7
	40	4	4.4	16.2	0.59	0.44	63	0.52	0.81	9.0
	52	4	4.4	16.2	0.59	0.44	63	0.52	0.81	9.0
	77	4	4.4	16.2	0.59	0.44	63	0.52	0.81	9.0
	100	4	4.4	16.2	0.59	0.44	63	0.52	0.81	9.0
	155	2	3.4	22.6	0.91	0.68	80	0.76	0.86	7.0
	200	2	3.4	22.6	0.91	0.68	80	0.76	0.86	7.0
<b>MX-20</b>	18	6	6.9	18.1	0.57	0.43	57	0.52	0.79	13.0
	26	4	4.3	19.9	0.66	0.50	62	0.72	0.74	10.0
	40	4	7.6	27.5	0.99	0.75	67	0.58	0.79	15.0
	52	4	7.6	27.5	0.99	0.75	67	0.58	0.79	15.0
	77	4	7.6	27.5	0.99	0.75	67	0.58	0.79	15.0
	100	4	7.6	27.5	0.99	0.75	67	0.58	0.79	15.0
	155	2	5.7	34.0	1.42	1.04	81	0.74	0.84	11.0
	200	2	5.7	34.0	1.42	1.04	81	0.74	0.84	11.0
<b>MX-40</b>	18	6	10.8	37.0	1.10	0.82	63	0.40	0.91	25.0
	26	4	7.4	39.0	1.30	0.97	70	0.65	0.81	20.0
	40	4	15.0	59.5	1.90	1.42	71	0.63	0.87	29.0
	52	4	15.0	59.5	1.90	1.42	71	0.63	0.87	29.0
	77	4	15.0	59.5	1.90	1.42	71	0.63	0.87	29.0
	100	4	15.0	59.5	1.90	1.42	71	0.63	0.87	29.0
	155	2	11.1	75.0	3.00	2.24	80	0.78	0.78	23.0
	200	2	11.1	75.0	3.00	2.24	80	0.78	0.78	23.0

Note 1: 230 volt not available in MX-85 and MX-140.

Note 2: Full load is defined as 20% of rated motor torque.

## MX actuators

380 volts, three-phase, 50 Hz (-22°F to 158°F) (-30°C to 70°C)

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-05</b>	15	6	1.1	2.1	0.11	0.08	38	0.44	0.89	3.0
	22	4	1.5	3.9	0.14	0.10	47	0.40	0.86	2.5
	33	4	1.4	3.6	0.22	0.16	52	0.40	0.87	4.0
	43	4	1.4	3.6	0.22	0.16	52	0.40	0.87	4.0
	65	4	1.4	3.6	0.22	0.16	52	0.40	0.87	4.0
	84	4	1.4	3.6	0.22	0.16	52	0.40	0.87	4.0
	127	2	1.4	6.2	0.35	0.26	57	0.58	0.95	3.25
165	2	1.4	6.2	0.35	0.26	57	0.58	0.95	3.25	
<b>MX-10</b>	15	6	1.9	4.3	0.24	0.18	50	0.36	0.76	7.0
	22	4	1.5	5.2	0.31	0.23	57	0.47	0.86	5.7
	33	4	2.3	6.8	0.47	0.35	59	0.46	0.93	9.0
	43	4	2.3	6.8	0.47	0.35	59	0.46	0.93	9.0
	65	4	2.3	6.8	0.47	0.35	59	0.46	0.93	9.0
	84	4	2.3	6.8	0.47	0.35	59	0.46	0.93	9.0
	127	2	1.7	8.5	0.73	0.54	70	0.79	0.89	7.0
	165	2	1.7	8.5	0.73	0.54	70	0.79	0.89	7.0
<b>MX-20</b>	15	6	3.3	8.7	0.48	0.36	45	0.41	0.85	13.0
	22	4	2.2	10.2	0.55	0.41	63	0.52	0.85	10.0
	33	4	3.3	12.1	0.80	0.59	58	0.51	0.84	15.0
	43	4	3.3	12.1	0.80	0.59	58	0.51	0.84	15.0
	65	4	3.3	12.1	0.80	0.59	58	0.51	0.84	15.0
	84	4	3.3	12.1	0.80	0.59	58	0.51	0.84	15.0
	127	2	3.5	13.6	1.16	0.87	70	0.62	0.87	11.0
	165	2	3.5	13.6	1.16	0.87	70	0.62	0.87	11.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

380 volts, three-phase, 50 Hz (-22°F to 158°F) (-30°C to 70°C)

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-40</b>	15	6	5.5	18.0	0.90	0.67	52	0.41	0.79	25.0
	22	4	3.9	18.9	1.09	0.81	71	0.52	0.83	20.0
	33	4	6.0	20.0	1.57	1.18	64	0.49	0.79	29.0
	43	4	6.0	20.0	1.57	1.18	64	0.49	0.79	29.0
	65	4	6.0	20.0	1.57	1.18	64	0.49	0.79	29.0
	84	4	6.0	20.0	1.57	1.18	64	0.49	0.79	29.0
	127	2	7.1	44.0	2.50	1.77	76	0.71	0.85	23.0
165	2	7.1	44.0	2.50	1.77	76	0.71	0.85	23.0	
<b>MX-85</b>	21	4	4.8	23.0	2.4	1.8	75	0.72	0.96	45.0
	32	4	7.4	34.0	3.3	2.5	77	0.67	0.94	62.0
	43	4	7.4	34.0	3.3	2.5	77	0.67	0.94	62.0
	65	4	7.4	34.0	3.3	2.5	77	0.67	0.94	62.0
	110	4	7.4	34.0	3.3	2.5	77	0.67	0.94	62.0
	143	4	7.4	34.0	3.3	2.5	77	0.67	0.94	62.0
<b>MX-140</b>	21	4	7.4	34.0	3.3	2.5	77	0.67	0.94	62.0
	32	4	10.3	55.0	4.6	4.4	78	0.65	0.83	85.0
	43	4	10.3	55.0	4.6	4.4	78	0.65	0.83	85.0
	65	4	10.3	55.0	4.6	4.4	78	0.65	0.83	85.0
	110	4	10.3	55.0	4.6	4.4	78	0.65	0.83	85.0
	143	4	10.3	55.0	4.6	4.4	78	0.65	0.83	85.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

380 volts, three-phase, 60 Hz (-22°F to 158°F) (-30°C to 70°C)

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-05</b>	18	6	0.9	2.8	0.13	0.10	42	0.44	0.80	3.0
	26	4	1.2	3.0	0.16	0.12	43	0.42	0.87	2.5
	40	4	1.3	4.5	0.26	0.19	63	0.50	0.92	4.0
	52	4	1.3	4.5	0.26	0.19	63	0.50	0.92	4.0
	77	4	1.3	4.5	0.26	0.19	63	0.50	0.92	4.0
	100	4	1.3	4.5	0.26	0.19	63	0.50	0.92	4.0
	155	2	1.2	6.1	0.42	0.31	65	0.73	0.99	3.25
200	2	1.2	6.1	0.42	0.31	65	0.73	0.99	3.25	
<b>MX-10</b>	18	6	1.9	6.2	0.30	0.23	45	0.44	0.74	7.0
	26	4	1.9	6.4	0.36	0.28	55	0.47	0.79	5.7
	40	4	2.6	11.2	0.59	0.44	63	0.46	0.80	9.0
	52	4	2.6	11.2	0.59	0.44	63	0.46	0.80	9.0
	77	4	2.6	11.2	0.59	0.44	63	0.46	0.80	9.0
	100	4	2.6	11.2	0.59	0.44	63	0.46	0.80	9.0
	155	2	1.8	14.2	0.91	0.68	76	0.91	0.81	7.0
	200	2	1.8	14.2	0.91	0.68	76	0.91	0.81	7.0
<b>MX-20</b>	18	6	3.3	11.9	0.56	0.43	58	0.38	0.74	13.0
	26	4	1.9	13.0	0.65	0.50	68	0.64	0.83	10.0
	40	4	3.9	16.0	0.98	0.74	68	0.48	0.83	15.0
	52	4	3.9	16.0	0.98	0.74	68	0.48	0.83	15.0
	77	4	3.9	16.0	0.98	0.74	68	0.48	0.83	15.0
	100	4	3.9	16.0	0.98	0.74	68	0.48	0.83	15.0
	155	2	3.8	24.0	1.44	1.04	78	0.63	0.80	11.0
	200	2	3.8	24.0	1.44	1.04	78	0.63	0.80	11.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

380 volts, three-phase, 60 Hz (-22°F to 158°F) (-30°C to 70°C)

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-40</b>	18	6	7.3	21.0	1.10	0.82	61	0.39	0.73	25.0
	26	4	4.3	22.2	1.30	0.97	74	0.57	0.73	20.0
	40	4	6.7	30.4	1.90	1.42	69	0.52	0.78	29.0
	52	4	6.7	30.4	1.90	1.42	69	0.52	0.78	29.0
	77	4	6.7	30.4	1.90	1.42	69	0.52	0.78	29.0
	100	4	6.7	30.4	1.90	1.42	69	0.52	0.78	29.0
	155	2	6.6	48.8	3.00	2.24	80	0.75	0.85	23.0
200	2	6.6	48.8	3.00	2.24	80	0.75	0.85	23.0	
<b>MX-85</b>	Not Applicable									
<b>MX-140</b>	21	4	7.0	33.0	3.90	2.90	80	0.72	0.86	62.0
	32	4	11.6	48.0	5.40	5.50	73	0.72	0.95	85.0
	43	4	11.6	48.0	5.40	5.50	73	0.72	0.95	85.0
	65	4	11.6	48.0	5.40	5.50	73	0.72	0.95	85.0
	110	4	11.6	48.0	5.40	5.50	73	0.72	0.95	85.0
	143	4	11.6	48.0	5.40	5.50	73	0.72	0.95	85.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

400 volts, three-phase, 50 Hz (-22°F to 158°F) (-30°C to 70°C)

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-05</b>	15	6	1.2	2.6	0.11	0.08	38	0.44	0.89	3.0
	22	4	0.8	2.1	0.14	0.10	47	0.40	0.86	2.5
	33	4	1.3	3.0	0.22	0.16	52	0.40	0.87	4.0
	43	4	1.3	3.0	0.22	0.16	52	0.40	0.87	4.0
	65	4	1.3	3.0	0.22	0.16	52	0.40	0.87	4.0
	84	4	1.3	3.0	0.22	0.16	52	0.40	0.87	4.0
	127	2	1.3	5.8	0.35	0.26	57	0.58	0.95	3.25
	165	2	1.3	5.8	0.35	0.26	57	0.58	0.95	3.25
<b>MX-10</b>	15	6	2.1	6.3	0.24	0.18	50	0.36	0.76	7.0
	22	4	1.5	5.6	0.31	0.23	57	0.47	0.86	5.7
	33	4	2.5	8.0	0.47	0.35	59	0.46	0.93	9.0
	43	4	2.5	8.0	0.47	0.35	59	0.46	0.93	9.0
	65	4	2.5	8.0	0.47	0.35	59	0.46	0.93	9.0
	84	4	2.5	8.0	0.47	0.35	59	0.46	0.93	9.0
	127	2	1.4	13.2	0.73	0.54	70	0.79	0.89	7.0
	165	2	1.4	13.2	0.73	0.54	70	0.79	0.89	7.0
<b>MX-20</b>	15	6	2.2	9.5	0.48	0.36	45	0.41	0.85	13.0
	22	4	1.7	10.0	0.55	0.41	63	0.52	0.85	10.0
	33	4	3.5	15.5	0.80	0.59	58	0.51	0.84	15.0
	43	4	3.5	15.5	0.80	0.59	58	0.51	0.84	15.0
	65	4	3.5	15.5	0.80	0.59	58	0.51	0.84	15.0
	84	4	3.5	15.5	0.80	0.59	58	0.51	0.84	15.0
	127	2	3.5	17.8	1.16	0.87	70	0.62	0.87	11.0
	165	2	3.5	17.8	1.16	0.87	70	0.62	0.87	11.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

400 volts, three-phase, 50 Hz (-22°F to 158°F) (-30°C to 70°C)

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-40</b>	15	6	4.8	19.5	0.90	0.67	52	0.41	0.79	25.0
	22	4	3.5	24.3	1.09	0.81	71	0.52	0.83	20.0
	33	4	5.0	26.0	1.57	1.18	64	0.49	0.79	29.0
	43	4	5.0	26.0	1.57	1.18	64	0.49	0.79	29.0
	65	4	5.0	26.0	1.57	1.18	64	0.49	0.79	29.0
	84	4	5.0	26.0	1.57	1.18	64	0.49	0.79	29.0
	127	2	4.7	30.0	2.50	1.77	76	0.71	0.85	23.0
165	2	4.7	30.0	2.50	1.77	76	0.71	0.85	23.0	
<b>MX-85</b>	21	4	5.4	24.0	2.4	1.8	69	0.67	0.95	45.0
	32	4	8.1	36.0	3.4	2.5	73	0.61	0.9	62.0
	43	4	8.1	36.0	3.4	2.5	73	0.61	0.9	62.0
	65	4	8.1	36.0	3.4	2.5	73	0.61	0.9	62.0
	110	4	8.1	36.0	3.4	2.5	73	0.61	0.9	62.0
	143	4	8.1	36.0	3.4	2.5	73	0.61	0.9	62.0
<b>MX-140</b>	21	4	8.1	36.0	3.4	2.5	73	0.61	0.9	62.0
	32	4	10.9	60.0	4.6	4.6	75	0.60	0.84	85.0
	43	4	10.9	60.0	4.6	4.6	75	0.60	0.84	85.0
	65	4	10.9	60.0	4.6	4.6	75	0.60	0.84	85.0
	110	4	10.9	60.0	4.6	4.6	75	0.60	0.84	85.0
	143	4	10.9	60.0	4.6	4.6	75	0.60	0.84	85.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

415 volts, three-phase, 50 Hz (-22°F to 158°F) (-30°C to 70°C)

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-05</b>	15	6	1.2	2.6	0.11	0.08	34	0.37	0.78	3.0
	22	4	0.8	2.1	0.14	0.10	47	0.50	0.89	2.5
	33	4	1.3	3.0	0.22	0.16	48	0.38	0.86	4.0
	43	4	1.3	3.0	0.22	0.16	48	0.38	0.86	4.0
	65	4	1.3	3.0	0.22	0.16	48	0.38	0.86	4.0
	84	4	1.3	3.0	0.22	0.16	48	0.38	0.86	4.0
	127	2	1.3	5.8	0.35	0.26	52	0.46	0.91	3.25
	165	2	1.3	5.8	0.35	0.26	52	0.46	0.91	3.25
<b>MX-10</b>	15	6	2.1	6.3	0.25	0.18	37	0.37	0.64	7.0
	22	4	1.5	5.6	0.31	0.23	53	0.49	0.86	5.7
	33	4	2.5	8.0	0.49	0.35	61	0.44	0.79	9.0
	43	4	2.5	8.0	0.49	0.35	61	0.44	0.79	9.0
	65	4	2.5	8.0	0.49	0.35	61	0.44	0.79	9.0
	84	4	2.5	8.0	0.49	0.35	61	0.44	0.79	9.0
	127	2	1.4	13.2	0.75	0.54	77	0.63	0.70	7.0
	165	2	1.4	13.2	0.75	0.54	77	0.63	0.70	7.0
<b>MX-20</b>	15	6	2.2	9.5	0.46	0.36	48	0.48	0.82	13.0
	22	4	1.7	10.0	0.54	0.41	59	0.56	0.71	10.0
	33	4	3.5	15.5	0.81	0.59	62	0.56	0.74	15.0
	43	4	3.5	15.5	0.81	0.59	62	0.56	0.74	15.0
	65	4	3.5	15.5	0.81	0.59	62	0.56	0.74	15.0
	84	4	3.5	15.5	0.81	0.59	62	0.56	0.74	15.0
	127	2	3.5	17.8	1.17	0.87	73	0.60	0.82	11.0
	165	2	3.5	17.8	1.17	0.87	73	0.60	0.82	11.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

415 volts, three-phase, 50 Hz (-22°F to 158°F) (-30°C to 70°C)

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-40</b>	15	6	4.8	19.5	0.89	0.67	53	0.39	0.66	25.0
	23	4	3.6	24.3	1.10	0.81	63	0.52	0.73	20.0
	33	4	5.0	26.0	1.57	1.18	62	0.63	0.80	29.0
	43	4	5.0	26.0	1.57	1.18	62	0.63	0.80	29.0
	65	4	5.0	26.0	1.57	1.18	62	0.63	0.80	29.0
	84	4	5.0	26.0	1.57	1.18	62	0.63	0.80	29.0
	127	2	4.7	30.0	2.44	1.77	73	0.69	0.79	23.0
165	2	4.7	30.0	2.44	1.77	73	0.69	0.79	23.0	
<b>MX-85</b>	21	4	6.0	26.0	2.5	1.9	65	0.65	0.92	45.0
	32	4	8.9	36.0	3.4	2.5	71	0.55	0.91	62.0
	43	4	8.9	36.0	3.4	2.5	71	0.55	0.91	62.0
	65	4	8.9	36.0	3.4	2.5	71	0.55	0.91	62.0
	110	4	8.9	36.0	3.4	2.5	71	0.55	0.91	62.0
	143	4	8.9	36.0	3.4	2.5	71	0.55	0.91	62.0
<b>MX-140</b>	21	4	8.9	36.0	3.4	2.5	71	0.55	0.91	62.0
	32	4	12.0	68.0	4.6	5.2	67	0.60	0.86	85.0
	43	4	12.0	68.0	4.6	5.2	67	0.60	0.86	85.0
	65	4	12.0	68.0	4.6	5.2	67	0.60	0.86	85.0
	110	4	12.0	68.0	4.6	5.2	67	0.60	0.86	85.0
	143	4	12.0	68.0	4.6	5.2	67	0.60	0.86	85.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

460 volts, three-phase, 60 Hz (-22°F to 158°F) (-30°C to 70°C)

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-05</b>	18	6	1.2	2.6	0.13	0.10	44	0.37	0.77	3.0
	26	4	0.8	2.1	0.16	0.12	54	0.46	0.84	2.5
	40	4	1.3	3.0	0.26	0.19	59	0.50	0.87	4.0
	52	4	1.3	3.0	0.26	0.19	59	0.50	0.87	4.0
	77	4	1.3	3.0	0.26	0.19	59	0.50	0.87	4.0
	100	4	1.3	3.0	0.26	0.19	59	0.50	0.87	4.0
	155	2	1.3	5.8	0.42	0.31	60	0.59	0.91	3.25
200	2	1.3	5.8	0.42	0.31	60	0.59	0.91	3.25	
<b>MX-10</b>	18	6	2.1	6.3	0.32	0.23	46	0.42	0.75	7.0
	26	4	1.5	5.6	0.37	0.28	57	0.52	0.85	5.7
	40	4	2.5	8.0	0.59	0.44	63	0.52	0.81	9.0
	52	4	2.5	8.0	0.59	0.44	63	0.52	0.81	9.0
	77	4	2.5	8.0	0.59	0.44	63	0.52	0.81	9.0
	100	4	2.5	8.0	0.59	0.44	63	0.52	0.81	9.0
	155	2	1.4	13.2	0.89	0.68	80	0.76	0.85	7.0
	200	2	1.4	13.2	0.89	0.68	80	0.76	0.85	7.0
<b>MX-20</b>	18	6	2.2	9.5	0.58	0.43	57	0.52	0.79	13.0
	26	4	1.7	10.0	0.67	0.50	62	0.72	0.74	10.0
	40	4	3.5	15.5	1.00	0.75	67	0.58	0.79	15.0
	52	4	3.5	15.5	1.00	0.75	67	0.58	0.79	15.0
	77	4	3.5	15.5	1.00	0.75	67	0.58	0.79	15.0
	100	4	3.5	15.5	1.00	0.75	67	0.58	0.79	15.0
	155	2	3.5	17.8	1.40	1.04	81	0.74	0.84	11.0
	200	2	3.5	17.8	1.40	1.04	81	0.74	0.84	11.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

460 volts, three-phase, 60 Hz (-22°F to 158°F) (-30°C to 70°C)

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-40</b>	18	6	4.8	19.5	1.10	0.82	63	0.40	0.91	25.0
	26	4	3.6	24.3	1.30	0.97	70	0.65	0.81	20.0
	40	4	5.0	26.0	1.90	1.42	71	0.63	0.87	29.0
	52	4	5.0	26.0	1.90	1.42	71	0.63	0.87	29.0
	77	4	5.0	26.0	1.90	1.42	71	0.63	0.87	29.0
	100	4	5.0	26.0	1.90	1.42	71	0.63	0.87	29.0
	155	2	4.7	30.0	3.00	2.24	80	0.78	0.78	23.0
200	2	4.7	30.0	3.00	2.24	80	0.78	0.78	23.0	
<b>MX-85</b>	25	4	5.1	28.0	2.9	2.2	76	0.70	0.76	45.0
	38	4	11.0	46.0	4.0	3.0	75	0.63	0.86	62.0
	52	4	11.0	46.0	4.0	3.0	75	0.63	0.86	62.0
	77	4	11.0	46.0	4.0	3.0	75	0.63	0.86	62.0
	131	4	11.0	46.0	4.0	3.0	75	0.63	0.86	62.0
	170	4	11.0	46.0	4.0	3.0	75	0.63	0.86	62.0
<b>MX-140</b>	25	4	11.0	46.0	4.0	3.0	75	0.63	0.86	62.0
	38	4	12.0	60.0	5.4	6.0	67	0.68	0.84	85.0
	52	4	12.0	60.0	5.4	6.0	67	0.68	0.84	85.0
	77	4	12.0	60.0	5.4	6.0	67	0.68	0.84	85.0
	131	4	12.0	60.0	5.4	6.0	67	0.68	0.84	85.0
	170	4	12.0	60.0	5.4	6.0	67	0.68	0.84	85.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

575 volts, three-phase, 60 Hz (-22°F to 158°F) (-30°C to 70°C)

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-05</b>	18	6	0.7	1.9	0.13	0.10	38	0.39	0.75	3.0
	26	4	0.8	2.2	0.16	0.12	54	0.44	0.86	2.5
	40	4	0.8	2.9	0.26	0.19	54	0.42	0.87	4.0
	52	4	0.8	2.9	0.26	0.19	54	0.42	0.87	4.0
	77	4	0.8	2.9	0.26	0.19	54	0.42	0.87	4.0
	100	4	0.8	2.9	0.26	0.19	54	0.42	0.87	4.0
	155	2	1.2	4.4	0.42	0.31	60	0.58	0.91	3.25
200	2	1.2	4.4	0.42	0.31	60	0.58	0.91	3.25	
<b>MX-10</b>	18	6	1.5	4.6	0.31	0.24	46	0.45	0.79	7.0
	26	4	1.7	4.9	0.37	0.28	57	0.45	0.83	5.7
	40	4	1.7	7.3	0.59	0.44	63	0.50	0.80	9.0
	52	4	1.7	7.3	0.59	0.44	63	0.50	0.80	9.0
	77	4	1.7	7.3	0.59	0.44	63	0.50	0.80	9.0
	100	4	1.7	7.3	0.59	0.44	63	0.50	0.80	9.0
	155	2	1.3	9.6	0.91	0.66	80	0.71	0.86	7.0
	200	2	1.3	9.6	0.91	0.66	80	0.71	0.86	7.0
<b>MX-20</b>	18	6	2.0	7.5	0.57	0.43	57	0.52	0.79	13.0
	26	4	1.5	8.3	0.66	0.50	62	0.72	0.74	10.0
	40	4	2.3	12.4	0.99	0.75	67	0.58	0.79	15.0
	52	4	2.3	12.4	0.99	0.75	67	0.58	0.79	15.0
	77	4	2.3	12.4	0.99	0.75	67	0.58	0.79	15.0
	100	4	2.3	12.4	0.99	0.75	67	0.58	0.79	15.0
	155	2	2.4	15.7	1.42	1.04	81	0.74	0.84	11.0
	200	2	2.4	15.7	1.42	1.04	81	0.74	0.84	11.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

575 volts, three-phase, 60 Hz (-22°F to 158°F) (-30°C to 70°C)

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-40</b>	18	6	3.2	14.3	1.10	0.82	63	0.39	0.91	25.0
	26	4	2.7	14.3	1.30	0.97	70	0.65	0.81	20.0
	40	4	4.1	19.1	1.90	1.42	71	0.63	0.87	29.0
	52	4	4.1	19.1	1.90	1.42	71	0.63	0.87	29.0
	77	4	4.1	19.1	1.90	1.42	71	0.63	0.87	29.0
	100	4	4.1	19.1	1.90	1.42	71	0.63	0.87	29.0
	155	2	4.0	30.0	3.00	2.24	81	0.78	0.78	23.0
	200	2	4.0	30.0	3.00	2.24	81	0.78	0.78	23.0
<b>MX-85</b>	25	4	4.0	22.0	2.9	2.2	76	0.70	0.76	45.0
	38	4	9.5	37.0	4.0	3.0	75	0.63	0.86	62.0
	52	4	9.5	37.0	4.0	3.0	75	0.63	0.86	62.0
	77	4	9.5	37.0	4.0	3.0	75	0.63	0.86	62.0
	131	4	9.5	37.0	4.0	3.0	75	0.63	0.86	62.0
	170	4	9.5	37.0	4.0	3.0	75	0.63	0.86	62.0
<b>MX-140</b>	25	4	9.5	37.0	4.0	3.0	75	0.63	0.86	62.0
	38	4	11.0	48.0	5.4	6.0	67	0.68	0.84	85.0
	52	4	11.0	48.0	5.4	6.0	67	0.68	0.84	85.0
	77	4	11.0	48.0	5.4	6.0	67	0.68	0.84	85.0
	131	4	11.0	48.0	5.4	6.0	67	0.68	0.84	85.0
	170	4	11.0	48.0	5.4	6.0	67	0.68	0.84	85.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

Low-temperature applications (-58°F to 122°F) (-50°C to 50°C)  
 380 volts, three-phase, 50 Hz

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-05</b>	15	6	1.7	2.1	0.11	0.08	38	0.44	0.89	3.0
	22	4	2.3	3.9	0.14	0.10	47	0.40	0.86	2.5
	33	4	2.1	3.6	0.22	0.16	52	0.40	0.87	4.0
	43	4	2.1	3.6	0.22	0.16	52	0.40	0.87	4.0
	65	4	2.1	3.6	0.22	0.16	52	0.40	0.87	4.0
	84	4	2.1	3.6	0.22	0.16	52	0.40	0.87	4.0
	127	2	2.1	6.2	0.35	0.26	57	0.58	0.95	3.25
	165	2	2.1	6.2	0.35	0.26	57	0.58	0.95	3.25
<b>MX-10</b>	15	6	2.9	4.3	0.24	0.18	50	0.36	0.76	7.0
	22	4	2.3	5.2	0.31	0.23	57	0.47	0.86	5.7
	33	4	3.5	6.8	0.47	0.35	59	0.46	0.93	9.0
	43	4	3.5	6.8	0.47	0.35	59	0.46	0.93	9.0
	65	4	3.5	6.8	0.47	0.35	59	0.46	0.93	9.0
	84	4	3.5	6.8	0.47	0.35	59	0.46	0.93	9.0
	127	2	3.1	8.5	0.73	0.54	70	0.79	0.89	7.0
	165	2	3.1	8.5	0.73	0.54	70	0.79	0.89	7.0
<b>MX-20</b>	15	6	5.0	8.7	0.48	0.36	45	0.41	0.85	13.0
	22	4	3.3	10.2	0.55	0.41	63	0.52	0.85	10.0
	33	4	5.0	12.1	0.80	0.59	58	0.51	0.84	15.0
	43	4	5.0	12.1	0.80	0.59	58	0.51	0.84	15.0
	65	4	5.0	12.1	0.80	0.59	58	0.51	0.84	15.0
	84	4	5.0	12.1	0.80	0.59	58	0.51	0.84	15.0
	127	2	5.3	13.6	1.16	0.87	70	0.62	0.87	11.0
	165	2	5.3	13.6	1.16	0.87	70	0.62	0.87	11.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

Low-temperature applications (-58°F to 122°F) (-50°C to 50°C)  
 380 volts, three-phase, 50 Hz

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-40</b>	15	6	8.3	18.0	0.90	0.67	52	0.41	0.79	25.0
	22	4	5.9	18.9	1.09	0.81	71	0.52	0.83	20.0
	33	4	9.0	20.0	1.57	1.18	64	0.49	0.79	29.0
	43	4	9.0	20.0	1.57	1.18	64	0.49	0.79	29.0
	65	4	9.0	20.0	1.57	1.18	64	0.49	0.79	29.0
	84	4	9.0	20.0	1.57	1.18	64	0.49	0.79	29.0
	127	2	11.5	44.0	2.50	1.77	76	0.71	0.85	23.0
	165	2	11.5	44.0	2.50	1.77	76	0.71	0.85	23.0
<b>MX-85</b>	21	4	7.5	23.0	2.4	1.8	75	0.72	0.96	45.0
	32	4	11.1	34.0	3.3	2.5	77	0.67	0.94	62.0
	43	4	11.1	34.0	3.3	2.5	77	0.67	0.94	62.0
	65	4	11.1	34.0	3.3	2.5	77	0.67	0.94	62.0
	110	4	11.1	34.0	3.3	2.5	77	0.67	0.94	62.0
	143	4	11.1	34.0	3.3	2.5	77	0.67	0.94	62.0
<b>MX-140</b>	21	4	11.1	34.0	3.3	2.5	77	0.67	0.94	62.0
	32	4	12.0	55.0	4.6	4.4	78	0.65	0.83	85.0
	43	4	12.0	55.0	4.6	4.4	78	0.65	0.83	85.0
	65	4	12.0	55.0	4.6	4.4	78	0.65	0.83	85.0
	110	4	12.0	55.0	4.6	4.4	78	0.65	0.83	85.0
	143	4	12.0	55.0	4.6	4.4	78	0.65	0.83	85.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

Low-temperature applications (-58°F to 122°F) (-50°C to 50°C)  
 380 volts, three-phase, 60 Hz

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-05</b>	18	6	1.4	2.8	0.13	0.10	42	0.44	0.80	3.0
	26	4	1.8	3.0	0.16	0.12	43	0.42	0.87	2.5
	40	4	2.0	4.5	0.26	0.19	63	0.50	0.92	4.0
	52	4	2.0	4.5	0.26	0.19	63	0.50	0.92	4.0
	77	4	2.0	4.5	0.26	0.19	63	0.50	0.92	4.0
	100	4	2.0	4.5	0.26	0.19	63	0.50	0.92	4.0
	155	2	1.8	6.1	0.42	0.31	65	0.73	0.99	3.25
	200	2	1.8	6.1	0.42	0.31	65	0.73	0.99	3.25
<b>MX-10</b>	18	6	2.9	6.2	0.30	0.23	45	0.44	0.74	7.0
	26	4	2.2	6.4	0.36	0.28	55	0.47	0.79	5.7
	40	4	3.9	11.2	0.59	0.44	63	0.46	0.80	9.0
	52	4	3.9	11.2	0.59	0.44	63	0.46	0.80	9.0
	77	4	3.9	11.2	0.59	0.44	63	0.46	0.80	9.0
	100	4	3.9	11.2	0.59	0.44	63	0.46	0.80	9.0
	155	2	3.5	14.2	0.91	0.68	76	0.91	0.81	7.0
	200	2	3.5	14.2	0.91	0.68	76	0.91	0.81	7.0
<b>MX-20</b>	18	6	5.0	11.9	0.56	0.43	58	0.38	0.74	13.0
	26	4	3.0	13.0	0.65	0.50	68	0.64	0.83	10.0
	40	4	5.9	16.0	0.98	0.74	68	0.48	0.83	15.0
	52	4	5.9	16.0	0.98	0.74	68	0.48	0.83	15.0
	77	4	5.9	16.0	0.98	0.74	68	0.48	0.83	15.0
	100	4	5.9	16.0	0.98	0.74	68	0.48	0.83	15.0
	155	2	6.6	24.0	1.44	1.04	78	0.63	0.80	11.0
	200	2	6.6	24.0	1.44	1.04	78	0.63	0.80	11.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

Low-temperature applications (-58°F to 122°F) (-50°C to 50°C)  
 380 volts, three-phase, 60 Hz

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-40</b>	18	6	11.0	21.0	1.10	0.82	61	0.39	0.73	25.0
	26	4	6.7	22.0	1.30	0.97	74	0.57	0.73	20.0
	40	4	10.1	30.4	1.90	1.42	69	0.52	0.78	29.0
	52	4	10.1	30.4	1.90	1.42	69	0.52	0.78	29.0
	77	4	10.1	30.4	1.90	1.42	69	0.52	0.78	29.0
	100	4	10.1	30.4	1.90	1.42	69	0.52	0.78	29.0
	155	2	12.1	48.8	3.00	2.24	80	0.75	0.85	23.0
	200	2	12.1	48.8	3.00	2.24	80	0.75	0.85	23.0
<b>MX-85</b>	Not Applicable									
<b>MX-140<sup>2</sup></b>	21	4	10.0	33.0	3.90	2.90	80	0.72	0.86	62.0
	32	4	12.0	48.0	5.40	5.50	73	0.72	0.95	85.0
	43	4	12.0	48.0	5.40	5.50	73	0.72	0.95	85.0
	65	4	12.0	48.0	5.40	5.50	73	0.72	0.95	85.0
	110	4	12.0	48.0	5.40	5.50	73	0.72	0.95	85.0
	143	4	12.0	48.0	5.40	5.50	73	0.72	0.95	85.0

Note 1: Full load is defined as 20% of rated motor torque.

Note 2: Available in range from -35°C to 50°C.

## MX actuators

Low-temperature applications (-58°F to 122°F) (-50°C to 50°C)  
400 volts, three-phase, 50 Hz

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-05</b>	15	6	1.8	2.6	0.11	0.08	38	0.44	0.89	3.0
	22	4	1.2	2.1	0.14	0.10	47	0.40	0.86	2.5
	33	4	2.0	3.0	0.22	0.16	52	0.40	0.87	4.0
	43	4	2.0	3.0	0.22	0.16	52	0.40	0.87	4.0
	65	4	2.0	3.0	0.22	0.16	52	0.40	0.87	4.0
	84	4	2.0	3.0	0.22	0.16	52	0.40	0.87	4.0
	127	2	2.0	5.8	0.35	0.26	57	0.58	0.95	3.25
	165	2	2.0	5.8	0.35	0.26	57	0.58	0.95	3.25
<b>MX-10</b>	15	6	3.2	6.3	0.24	0.18	50	0.36	0.76	7.0
	22	4	2.3	5.6	0.31	0.23	57	0.47	0.86	5.7
	33	4	3.8	8.0	0.47	0.35	59	0.46	0.93	9.0
	43	4	3.8	8.0	0.47	0.35	59	0.46	0.93	9.0
	65	4	3.8	8.0	0.47	0.35	59	0.46	0.93	9.0
	84	4	3.8	8.0	0.47	0.35	59	0.46	0.93	9.0
	127	2	2.9	13.2	0.73	0.54	70	0.79	0.89	7.0
	165	2	2.9	13.2	0.73	0.54	70	0.79	0.89	7.0
<b>MX-20</b>	15	6	3.3	9.5	0.48	0.36	45	0.41	0.85	13.0
	22	4	2.6	10.5	0.55	0.41	63	0.52	0.85	10.0
	33	4	5.5	15.5	0.80	0.59	58	0.51	0.84	15.0
	43	4	5.5	15.5	0.80	0.59	58	0.51	0.84	15.0
	65	4	5.5	15.5	0.80	0.59	58	0.51	0.84	15.0
	84	4	5.5	15.5	0.80	0.59	58	0.51	0.84	15.0
	127	2	5.5	17.8	1.16	0.87	70	0.62	0.87	11.0
	165	2	5.5	17.8	1.16	0.87	70	0.62	0.87	11.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

Low-temperature applications (-58°F to 122°F) (-50°C to 50°C)  
400 volts, three-phase, 50 Hz

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-40</b>	15	6	7.2	14.5	0.90	0.67	52	0.41	0.79	25.0
	22	4	5.4	24.3	1.09	0.81	71	0.52	0.83	20.0
	33	4	7.5	26.0	1.57	1.18	64	0.49	0.79	29.0
	43	4	7.5	26.0	1.57	1.18	64	0.49	0.79	29.0
	65	4	7.5	26.0	1.57	1.18	64	0.49	0.79	29.0
	84	4	7.5	26.0	1.57	1.18	64	0.49	0.79	29.0
	127	2	8.7	30.0	2.50	1.77	76	0.71	0.85	23.0
	165	2	8.7	30.0	2.50	1.77	76	0.71	0.85	23.0
<b>MX-85</b>	21	4	8.1	24.0	2.4	1.8	69	0.67	0.95	45.0
	32	4	11.5	36.0	3.4	2.5	73	0.61	0.90	62.0
	43	4	11.5	36.0	3.4	2.5	73	0.61	0.90	62.0
	65	4	11.5	36.0	3.4	2.5	73	0.61	0.90	62.0
	110	4	11.5	36.0	3.4	2.5	73	0.61	0.90	62.0
	143	4	11.5	36.0	3.4	2.5	73	0.61	0.90	62.0
<b>MX-140</b>	21	4	11.5	36.0	3.4	2.5	73	0.61	0.90	62.0
	32	4	12.0	60.0	4.6	4.6	75	0.60	0.84	85.0
	43	4	12.0	60.0	4.6	4.6	75	0.60	0.84	85.0
	65	4	12.0	60.0	4.6	4.6	75	0.60	0.84	85.0
	110	4	12.0	60.0	4.6	4.6	75	0.60	0.84	85.0
	143	4	12.0	60.0	4.6	4.6	75	0.60	0.84	85.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

Low-temperature applications (-58°F to 122°F) (-50°C to 50°C)  
415 volts, three-phase, 50 Hz

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-05</b>	15	6	1.8	2.6	0.11	0.08	34	0.37	0.78	3.0
	22	4	1.2	2.1	0.14	0.10	47	0.50	0.89	2.5
	33	4	2.0	3.0	0.22	0.16	48	0.38	0.86	4.0
	43	4	2.0	3.0	0.22	0.16	48	0.38	0.86	4.0
	65	4	2.0	3.0	0.22	0.16	48	0.38	0.86	4.0
	84	4	2.0	3.0	0.22	0.16	48	0.38	0.86	4.0
	127	2	2.0	5.8	0.35	0.26	52	0.46	0.91	3.25
	165	2	2.0	5.8	0.35	0.26	52	0.46	0.91	3.25
<b>MX-10</b>	15	6	3.2	6.3	0.25	0.18	37	0.37	0.64	7.0
	22	4	2.3	5.6	0.31	0.23	53	0.49	0.86	5.7
	33	4	3.8	8.0	0.49	0.35	61	0.44	0.79	9.0
	43	4	3.8	8.0	0.49	0.35	61	0.44	0.79	9.0
	65	4	3.8	8.0	0.49	0.35	61	0.44	0.79	9.0
	84	4	3.8	8.0	0.49	0.35	61	0.44	0.79	9.0
	127	2	2.9	13.2	0.75	0.54	77	0.63	0.70	7.0
	165	2	2.9	13.2	0.75	0.54	77	0.63	0.70	7.0
<b>MX-20</b>	15	6	3.3	9.5	0.46	0.36	48	0.48	0.82	13.0
	22	4	2.6	10.0	0.54	0.41	59	0.56	0.71	10.0
	33	4	5.5	15.5	0.81	0.59	62	0.56	0.74	15.0
	43	4	5.5	15.5	0.81	0.59	62	0.56	0.74	15.0
	65	4	5.5	15.5	0.81	0.59	62	0.56	0.74	15.0
	84	4	5.5	15.5	0.81	0.59	62	0.56	0.74	15.0
	127	2	5.5	17.8	1.17	0.87	73	0.60	0.82	11.0
	165	2	5.5	17.8	1.17	0.87	73	0.60	0.82	11.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

Low-temperature applications (-58°F to 122°F) (-50°C to 50°C)  
415 volts, three-phase, 50 Hz

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-40</b>	15	6	7.2	19.5	0.89	0.67	53	0.39	0.66	25.0
	23	4	5.4	24.3	1.10	0.81	63	0.52	0.73	20.0
	33	4	7.5	26.0	1.57	1.18	62	0.63	0.80	29.0
	43	4	7.5	26.0	1.57	1.18	62	0.63	0.80	29.0
	65	4	7.5	26.0	1.57	1.18	62	0.63	0.80	29.0
	84	4	7.5	26.0	1.57	1.18	62	0.63	0.80	29.0
	127	2	8.7	30.0	2.44	1.77	73	0.69	0.79	23.0
	165	2	8.7	30.0	2.44	1.77	73	0.69	0.79	23.0
<b>MX-85</b>	21	4	9.0	26.0	2.5	1.9	65	0.65	0.92	45.0
	32	4	12.0	36.0	3.4	2.5	71	0.55	0.91	62.0
	43	4	12.0	36.0	3.4	2.5	71	0.55	0.91	62.0
	65	4	12.0	36.0	3.4	2.5	71	0.55	0.91	62.0
	110	4	12.0	36.0	3.4	2.5	71	0.55	0.91	62.0
	143	4	12.0	36.0	3.4	2.5	71	0.55	0.91	62.0
<b>MX-140</b>	21	4	12.0	36.0	3.4	2.5	71	0.55	0.91	62.0
	32	4	12.0	68.0	4.6	5.2	67	0.60	0.86	85.0
	43	4	12.0	68.0	4.6	5.2	67	0.60	0.86	85.0
	65	4	12.0	68.0	4.6	5.2	67	0.60	0.86	85.0
	110	4	12.0	68.0	4.6	5.2	67	0.60	0.86	85.0
	143	4	12.0	68.0	4.6	5.2	67	0.60	0.86	85.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

Low-temperature applications (-58°F to 122°F) (-50°C to 50°C)  
460 volts, three-phase, 60 Hz

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-05</b>	18	6	1.8	2.6	0.13	0.10	44	0.37	0.77	3.0
	26	4	1.2	2.1	0.16	0.12	54	0.46	0.84	2.5
	40	4	2.0	3.0	0.26	0.19	59	0.50	0.87	4.0
	52	4	2.0	3.0	0.26	0.19	59	0.50	0.87	4.0
	77	4	2.0	3.0	0.26	0.19	59	0.50	0.87	4.0
	100	4	2.0	3.0	0.26	0.19	59	0.50	0.87	4.0
	155	2	2.0	5.8	0.42	0.31	60	0.59	0.91	3.25
	200	2	2.0	5.8	0.42	0.31	60	0.59	0.91	3.25
<b>MX-10</b>	18	6	3.2	6.3	0.32	0.23	46	0.42	0.75	7.0
	26	4	2.3	5.6	0.37	0.28	57	0.52	0.85	5.7
	40	4	3.8	8.0	0.59	0.44	63	0.52	0.81	9.0
	52	4	3.8	8.0	0.59	0.44	63	0.52	0.81	9.0
	77	4	3.8	8.0	0.59	0.44	63	0.52	0.81	9.0
	100	4	3.8	8.0	0.59	0.44	63	0.52	0.81	9.0
	155	2	2.9	13.2	0.89	0.68	80	0.76	0.85	7.0
	200	2	2.9	13.2	0.89	0.68	80	0.76	0.85	7.0
<b>MX-20</b>	18	6	3.3	9.5	0.58	0.43	57	0.52	0.79	13.0
	26	4	2.6	10.0	0.67	0.50	62	0.72	0.74	10.0
	40	4	5.5	15.5	1.00	0.75	67	0.58	0.79	15.0
	52	4	5.5	15.5	1.00	0.75	67	0.58	0.79	15.0
	77	4	5.5	15.5	1.00	0.75	67	0.58	0.79	15.0
	100	4	5.5	15.5	1.00	0.75	67	0.58	0.79	15.0
	155	2	5.5	17.8	1.40	1.04	81	0.74	0.84	11.0
	200	2	5.5	17.8	1.40	1.04	81	0.74	0.84	11.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

Low-temperature applications (-58°F to 122°F) (-50°C to 50°C)  
 460 volts, three-phase, 60 Hz

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-40</b>	18	6	7.2	19.5	1.10	0.82	63	0.40	0.91	25.0
	26	4	5.4	24.3	1.30	0.97	70	0.65	0.81	20.0
	40	4	7.5	26.0	1.90	1.42	71	0.63	0.87	29.0
	52	4	7.5	26.0	1.90	1.42	71	0.63	0.87	29.0
	77	4	7.5	26.0	1.90	1.42	71	0.63	0.87	29.0
	100	4	7.5	26.0	1.90	1.42	71	0.63	0.87	29.0
	155	2	8.7	30.0	3.00	2.24	80	0.78	0.78	23.0
	200	2	8.7	30.0	3.00	2.24	80	0.78	0.78	23.0
<b>MX-85</b>	25	4	7.7	28	2.9	2.2	76	0.70	0.76	45.0
	38	4	12.0	39	4.0	3.0	75	0.63	0.86	62.0
	52	4	12.0	39	4.0	3.0	75	0.63	0.86	62.0
	77	4	12.0	39	4.0	3.0	75	0.63	0.86	62.0
	131	4	12.0	39	4.0	3.0	75	0.63	0.86	62.0
	170	4	12.0	39	4.0	3.0	75	0.63	0.86	62.0
<b>MX-140</b>	25	4	12.0	39	4.0	3.0	75	0.63	0.86	62.0
	38	4	12.0	60	5.4	6.0	67	0.68	0.84	85.0
	52	4	12.0	60	5.4	6.0	67	0.68	0.84	85.0
	77	4	12.0	60	5.4	6.0	67	0.68	0.84	85.0
	131	4	12.0	60	5.4	6.0	67	0.68	0.84	85.0
	170	4	12.0	60	5.4	6.0	67	0.68	0.84	85.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

Low-temperature applications (-58°F to 122°F) (-50°C to 50°C)  
575 volts, three-phase, 60 Hz

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-05</b>	18	6	1.1	1.9	0.13	0.10	38	0.39	0.75	3.0
	26	4	1.2	2.2	0.16	0.12	54	0.44	0.86	2.5
	40	4	1.2	2.9	0.26	0.19	54	0.42	0.87	4.0
	52	4	1.2	2.9	0.26	0.19	54	0.42	0.87	4.0
	77	4	1.2	2.9	0.26	0.19	54	0.42	0.87	4.0
	100	4	1.2	2.9	0.26	0.19	54	0.42	0.87	4.0
	155	2	1.8	4.4	0.42	0.31	60	0.58	0.91	3.25
	200	2	1.2	4.4	0.42	0.31	60	0.58	0.91	3.25
<b>MX-10</b>	18	6	2.3	4.6	0.31	0.24	46	0.45	0.79	7.0
	26	4	2.6	4.9	0.37	0.28	57	0.45	0.83	5.7
	40	4	2.6	7.3	0.59	0.44	63	0.50	0.80	9.0
	52	4	2.6	7.3	0.59	0.44	63	0.50	0.80	9.0
	77	4	2.6	7.3	0.59	0.44	63	0.50	0.80	9.0
	100	4	2.6	7.3	0.59	0.44	63	0.50	0.80	9.0
	155	2	2.6	9.6	0.91	0.66	80	0.71	0.86	7.0
	200	2	2.6	9.6	0.91	0.66	80	0.71	0.86	7.0
<b>MX-20</b>	18	6	3.0	7.5	0.57	0.43	57	0.52	0.79	13.0
	26	4	2.3	8.3	0.66	0.50	62	0.72	0.74	10.0
	40	4	3.5	12.4	0.99	0.75	67	0.58	0.79	15.0
	52	4	3.5	12.4	0.99	0.75	67	0.58	0.79	15.0
	77	4	3.5	12.4	0.99	0.75	67	0.58	0.79	15.0
	100	4	3.5	12.4	0.99	0.75	67	0.58	0.79	15.0
	155	2	4.0	15.7	1.42	1.04	81	0.74	0.84	11.0
	200	2	4.0	15.7	1.42	1.04	81	0.74	0.84	11.0

Note 1: Full load is defined as 20% of rated motor torque.

## MX actuators

Low-temperature applications (-58°F to 122°F) (-50°C to 50°C)  
575 volts, three-phase, 60 Hz

Actuator Model	Actuator Speed (RPM)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor	Torque (ft-lb)
					(hp)	(kW)				
<b>MX-40</b>	18	6	4.8	14.3	1.10	0.82	63	0.39	0.91	25.0
	26	4	4.2	14.3	1.30	0.97	70	0.65	0.81	20.0
	40	4	6.5	19.1	1.90	1.42	71	0.63	0.87	29.0
	52	4	6.5	19.1	1.90	1.42	71	0.63	0.87	29.0
	77	4	6.5	19.1	1.90	1.42	71	0.63	0.87	29.0
	100	4	6.5	19.1	1.90	1.42	71	0.63	0.87	29.0
	155	2	7.5	30.0	3.00	2.24	81	0.78	0.78	23.0
	200	2	7.5	30.0	3.00	2.24	81	0.78	0.78	23.0
<b>MX-85</b>	25	4	6.0	22.0	2.9	2.2	76	0.70	0.76	45.0
	38	4	9.1	31.0	4.0	3.0	75	0.63	0.86	62.0
	52	4	9.1	31.0	4.0	3.0	75	0.63	0.86	62.0
	77	4	9.1	31.0	4.0	3.0	75	0.63	0.86	62.0
	131	4	9.1	31.0	4.0	3.0	75	0.63	0.86	62.0
	170	4	9.1	31.0	4.0	3.0	75	0.63	0.86	62.0
<b>MX-140</b>	25	4	9.1	31.0	4.0	3.0	75	0.63	0.86	62.0
	38	4	12.0	48.0	5.4	6.0	67	0.68	0.84	85.0
	52	4	12.0	48.0	5.4	6.0	67	0.68	0.84	85.0
	77	4	12.0	48.0	5.4	6.0	67	0.68	0.84	85.0
	131	4	12.0	48.0	5.4	6.0	67	0.68	0.84	85.0
	170	4	12.0	48.0	5.4	6.0	67	0.68	0.84	85.0

Note 1: Full load is defined as 20% of rated motor torque.

## L120 actuators

208 volts, three-phase, 60 Hz

Actuator Model	Motor Size (ft-lb)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor
					(hp)	(kW)			
<b>L120-10</b>	3	4	3.8	11.1	0.19	0.14	36	0.47	0.87
	5	8	4.4	10.0	0.17	0.13	31	0.30	0.58
	5	4	3.8	12.2	0.33	0.24	51	0.40	0.89
	5	2	3.6	24.3	0.67	0.50	64	0.68	0.85
	7.5	4	3.8	17.0	0.50	0.37	62	0.50	0.86
	7.5	2	5.3	29.0	1.0	0.75	74	0.61	0.86
<b>L120-20</b>	7.5	4	3.8	17.0	0.5	0.37	62	0.50	0.86
	7.5	2	5.3	29.0	1.0	0.75	74	0.61	0.86
	10	8	6.6	14.4	0.32	0.24	39	0.34	0.58
	10	4	5.1	27.0	0.67	0.50	69	0.43	0.83
	10	2	7.3	38.0	1.35	1.00	73	0.58	0.85
	15	4	6.9	33.2	1.0	0.75	69	0.49	0.83
	15	2	10.0	60.0	2.0	1.5	75	0.60	0.85
<b>L120-40</b>	15	4	6.9	33.2	1.0	0.75	69	0.49	0.83
	15	2	10.0	60.0	2.0	1.5	75	0.60	0.85
	25	4	10.0	44.0	1.6	1.2	75	0.60	0.85
	25	2	10.4	71.0	3.2	2.4	79	0.76	0.85
<b>L120-85</b>	25	4	8.8	56.0	1.64	1.2	73	0.53	0.72
	25	2	11.6	80.0	3.30	2.5	85	0.79	0.85
	40	4	13.2	84.0	2.60	1.94	80	0.66	0.79
	40	2	18.0	135.0	5.30	3.95	84	0.76	0.74
	60	4	20.0	144.0	4.0	2.98	75	0.56	0.76
	60	2	22.5	219.8	8.0	6.0	93	0.80	0.76
<b>L120-190</b>	60	4	20.0	144.0	4.0	2.98	75	0.56	0.76
	60	2	22.5	219.8	8.0	6.0	93	0.80	0.76
	80	4	17.7	132.7	5.2	3.9	87	0.69	0.77
	80	2	29.6	230.0	10.7	8.0	92	0.81	0.77
<b>L120-420</b>	100	4	21.2	166.0	6.49	4.84	89	0.72	0.80
	100	2	37.6	321.0	13.0	9.7	87	0.83	0.74
	150	4	42.9	286.0	9.9	7.4	82	0.62	0.70
	150	2	54.4	436.0	19.4	14.5	88	0.85	0.74

Note 1: Full load is defined as 20% of rated motor torque. For 40% of rated motor torque please consult factory.

## L120 actuators

230 volts, three-phase, 60 Hz

Actuator Model	Motor Size (ft-lb)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor
					(hp)	(kW)			
<b>L120-10</b>	3	4	3.4	10.0	0.19	0.14	36	0.47	0.87
	5	8	4.0	9.0	0.17	0.13	31	0.30	0.58
	5	4	3.4	11.0	0.33	0.24	51	0.40	0.89
	5	2	3.2	22.0	0.67	0.50	64	0.68	0.85
	7.5	4	3.4	15.0	0.50	0.37	62	0.50	0.86
	7.5	2	4.8	26.0	1.00	0.75	74	0.61	0.86
<b>L120-20</b>	7.5	4	3.4	15.0	0.5	0.37	62	0.50	0.86
	7.5	2	4.8	26.0	1.0	0.75	74	0.61	0.86
	10	8	6.0	13.0	0.32	0.24	39	0.34	0.58
	10	4	4.6	24.0	0.67	0.5	69	0.43	0.83
	10	2	6.6	34.0	1.35	1.0	73	0.58	0.85
	15	4	6.2	30.0	1.00	0.75	69	0.49	0.83
	15	2	9.0	54.0	2.00	1.50	75	0.60	0.85
<b>L120-40</b>	15	4	6.2	28	1.00	0.75	69	0.49	0.83
	15	2	9.0	50	2.00	1.50	75	0.60	0.85
	25	4	9.0	40	1.60	1.20	75	0.60	0.85
	25	2	12.0	60	3.20	2.40	79	0.76	0.85
<b>L120-85</b>	25	4	8.2	61.0	1.64	1.2	73	0.53	0.72
	25	2	9.1	68.3	3.30	2.5	85	0.79	0.85
	40	4	11.8	76.0	2.60	1.94	80	0.66	0.79
	40	2	16.0	122.0	5.30	3.95	84	0.76	0.74
	60	4	18.0	120.0	4.0	2.98	75	0.56	0.76
	60	2	20.4	218.0	8.0	6.0	93	0.80	0.76
<b>L120-190</b>	60	4	18.0	218.0	4.0	2.98	75	0.56	0.76
	60	2	20.4	218.0	8.0	6.0	93	0.80	0.76
	80	4	16.0	120.0	5.2	3.9	87	0.69	0.77
	80	2	26.8	272.0	10.7	8.0	92	0.81	0.77
<b>L120-420</b>	100	4	19.4	150.0	6.6	4.9	89	0.72	0.80
	100	2	34.0	290.0	13.0	9.7	87	0.83	0.74
	150	4	39.0	260.0	9.9	7.4	82	0.62	0.70
	150	2	49.2	394.0	19.4	14.5	88	0.85	0.74

Note 1: Full load is defined as 20% of rated motor torque. For 40% of rated motor torque please consult factory.

## L120 actuators

416 volts, three-phase, 60 Hz

Actuator Model	Motor Size (ft-lb)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor
					(hp)	(kW)			
<b>L120-10</b>	3	4	1.9	5.5	0.19	0.14	36	0.47	0.87
	5	8	2.2	5.0	0.17	0.13	31	0.30	0.58
	5	4	1.9	6.1	0.33	0.24	51	0.40	0.89
	5	2	1.8	12.2	0.67	0.50	64	0.68	0.85
	7.5	4	1.9	8.5	0.50	0.37	62	0.50	0.86
	7.5	2	2.7	14.5	1.00	0.75	74	0.61	0.86
<b>L120-20</b>	7.5	4	1.9	8.5	0.5	0.37	62	0.50	0.86
	7.5	2	2.7	14.5	1.0	0.75	74	0.61	0.86
	10	8	3.3	7.2	0.32	0.24	39	0.34	0.58
	10	4	2.5	13.5	0.67	0.50	69	0.43	0.83
	10	2	3.6	19.0	1.35	1.00	73	0.58	0.85
	15	4	3.5	16.6	1.00	0.75	69	0.49	0.83
	15	2	5.0	30.0	2.00	1.5	75	0.60	0.85
<b>L120-40</b>	15	4	3.5	16.6	1.00	0.75	69	0.49	0.83
	15	2	5.0	30.0	2.00	1.5	75	0.60	0.85
	25	4	5.0	22.0	1.6	1.2	75	0.60	0.85
	25	2	5.2	35.5	3.20	2.4	79	0.76	0.85
<b>L120-85</b>	25	4	4.4	28.0	1.64	1.2	73	0.53	0.72
	25	2	5.8	40.0	3.30	2.5	85	0.79	0.85
	40	4	6.6	42.0	2.60	1.94	80	0.66	0.79
	40	2	9.0	67.5	5.30	3.95	84	0.76	0.74
	60	4	10.0	72.0	4.0	2.98	75	0.56	0.76
	60	2	11.2	109.9	8.0	6.0	93	0.80	0.76
<b>L120-190</b>	60	4	9.9	72.0	4.0	2.98	75	0.56	0.76
	60	2	11.2	109.9	8.0	6.0	93	0.80	0.76
	80	4	8.8	66.3	5.2	3.9	87	0.69	0.77
	80	2	19.8	150.0	10.7	8.0	92	0.81	0.77
<b>L120-420</b>	100	4	10.6	83.0	6.49	4.84	89	0.72	0.80
	100	2	18.8	160.5	13.0	9.7	87	0.83	0.74
	150	4	21.5	143.0	9.9	7.4	82	0.62	0.70
	150	2	27.2	218.0	19.4	14.5	88	0.85	0.74

Note 1: Full load is defined as 20% of rated motor torque. For 40% of rated motor torque please consult factory.

## L120 actuators

460 volts, three-phase, 60 Hz

Actuator Model	Motor Size (ft-lb)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor
					(hp)	(kW)			
<b>L120-10</b>	3	4	1.7	5.0	0.19	0.14	36	0.47	0.87
	5	8	2.0	4.5	0.17	0.13	31	0.30	0.58
	5	4	1.7	5.5	0.33	0.24	51	0.40	0.89
	5	2	1.6	11.0	0.67	0.50	64	0.68	0.85
	7.5	4	1.7	7.5	0.50	0.37	62	0.50	0.86
	7.5	2	2.4	13.0	1.0	0.75	74	0.61	0.86
<b>L120-20</b>	7.5	4	1.7	7.5	0.50	0.37	62	0.50	0.86
	7.5	2	2.4	13.0	1.0	0.75	74	0.61	0.86
	10	8	3.0	6.5	0.32	0.24	39	0.34	0.58
	10	4	2.3	12.0	0.67	0.50	69	0.43	0.83
	10	2	3.3	17.0	1.35	1.0	73	0.58	0.85
	15	4	3.1	15.0	1.0	0.75	69	0.49	0.83
	15	2	4.5	27.0	2.0	1.5	75	0.60	0.85
<b>L120-40</b>	15	4	3.1	15.0	1.00	0.75	69	0.49	0.83
	15	2	4.5	27.0	2.00	1.5	75	0.60	0.85
	25	4	4.5	20.0	1.6	1.2	75	0.60	0.85
	25	2	6.0	30.0	3.20	2.4	79	0.76	0.85
<b>L120-85</b>	25	4	4.1	30.5	1.64	1.2	73	0.53	0.72
	25	2	4.55	34.2	3.3	2.5	85	0.79	0.85
	40	4	5.9	38.0	2.60	1.94	80	0.66	0.79
	40	2	8.0	61.0	5.30	3.95	84	0.76	0.74
	60	4	9.0	60.0	4.0	2.98	75	0.56	0.76
	60	2	10.2	109.0	8.0	6.0	93	0.80	0.76
<b>L120-190</b>	60	4	9.0	60.0	4.0	2.98	75	0.56	0.76
	60	2	10.2	109.0	8.0	6.0	93	0.80	0.76
	80	4	8.0	6.0	5.2	3.9	87	0.69	0.77
	80	2	13.4	136.0	10.7	8.0	92	0.81	0.77
<b>L120-420</b>	100	4	9.7	75.0	6.6	4.9	89	0.72	0.80
	100	2	17.0	145.0	13.0	9.7	87	0.83	0.74
	150	4	19.5	130.0	9.9	7.4	82	0.62	0.70
	150	2	24.6	197.0	19.4	14.5	88	0.85	0.74

Note 1: Full load is defined as 20% of rated motor torque. For 40% of rated motor torque please consult factory.

## L120 actuators

575 volts, three-phase, 60 Hz

Actuator Model	Motor Size (ft-lb)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor
					(hp)	(kW)			
<b>L120-10</b>	3	4	1.4	4.0	0.19	0.14	36	0.47	0.87
	5	8	1.6	3.6	0.17	0.13	31	0.30	0.58
	5	4	1.4	4.4	0.33	0.24	51	0.40	0.89
	5	2	1.3	8.8	0.67	0.50	64	0.68	0.85
	7.5	4	1.4	6.0	0.5	0.37	62	0.50	0.86
	7.5	2	1.9	10.4	1.0	0.75	74	0.61	0.86
<b>L120-20</b>	7.5	4	1.4	6.0	0.50	0.37	62	0.50	0.86
	7.5	2	1.9	10.4	1.0	0.75	74	0.61	0.86
	10	8	2.4	5.2	0.32	0.24	39	0.34	0.58
	10	4	1.9	10.4	0.67	0.50	69	0.43	0.83
	10	2	2.6	13.6	1.35	1.0	73	0.58	0.85
	15	4	2.5	12.0	1.0	0.75	69	0.49	0.83
	15	2	3.5	21.6	2.0	1.5	75	0.60	0.85
<b>L120-40</b>	15	4	2.5	12.0	1.0	0.75	69	0.49	0.83
	15	2	3.5	21.6	2.0	1.5	75	0.60	0.85
	25	4	3.6	16.0	1.6	1.20	75	0.60	0.85
	25	2	4.8	24.0	3.2	2.4	79	0.76	0.85
<b>L120-85</b>	25	4	3.6	22.8	1.64	1.2	67	0.58	0.72
	25	2	3.6	27.3	3.3	2.5	87	0.81	0.81
	40	4	4.7	30.4	2.60	1.94	80	0.66	0.79
	40	2	6.4	48.8	5.30	3.95	84	0.76	0.74
	60	4	7.2	52.0	4.0	2.98	75	0.56	0.76
	60	2	8.2	87.2	8.0	6.0	93	0.80	0.76
<b>L120-190</b>	60	4	7.2	52.0	4.0	2.98	75	0.56	0.76
	60	2	8.2	87.2	8.0	6.0	93	0.80	0.76
	80	4	6.4	41.0	5.2	3.9	87	0.69	0.77
	80	2	10.7	109.0	10.7	8.0	92	0.81	0.77
<b>L120-420</b>	100	4	7.7	61.8	6.5	4.85	89	0.72	0.80
	100	2	13.6	116.0	13.0	9.70	87	0.83	0.74
	150	4	16.0	104.0	9.9	7.40	82	0.62	0.70
	150	2	19.7	158.0	19.4	14.5	88	0.85	0.74

Note 1: Full load is defined as 20% of rated motor torque. For 40% of rated motor torque please consult factory.

## L120 actuators

380 volts, three-phase, 50 Hz

Actuator Model	Motor Size (ft-lb)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor
					(hp)	(kW)			
<b>L120-10</b>	3	4	1.7	5.0	0.16	0.11	40	0.50	0.86
	5	8	2.0	4.0	0.14	0.10	25	0.31	0.57
	5	4	1.7	5.0	0.27	0.20	40	0.53	0.89
	5	2	1.5	10.0	0.55	0.41	64	0.68	0.88
	7.5	4	1.5	6.0	0.40	0.30	58	0.57	0.86
	7.5	2	2.1	13.0	0.80	0.60	72	0.70	0.86
<b>L120-20</b>	7.5	4	1.5	6.0	0.40	0.30	58	0.57	0.86
	7.5	2	2.1	13.0	0.80	0.60	72	0.70	0.86
	10	8	2.5	6.5	0.28	0.20	40	0.35	0.58
	10	4	2.3	9.0	0.55	0.41	65	0.45	0.86
	10	2	3.3	17.0	1.1	0.80	63	0.60	0.87
	15	4	2.7	14.0	0.80	0.60	64	0.48	0.83
	15	2	4.0	25.0	1.6	1.2	73	0.66	0.86
<b>L120-40</b>	15	4	2.7	14.0	0.80	0.60	64	0.48	0.83
	15	2	4.0	25.0	1.6	1.2	73	0.66	0.86
	25	4	4.5	19.0	1.3	1.0	73	0.66	0.86
	25	2	6.0	27.0	2.7	2.0	77	0.66	0.86
<b>L120-85</b>	25	4	4.1	30.5	1.4	1.1	61	0.53	0.72
	25	2	4.6	34.1	2.7	2.0	71	0.79	0.85
	40	4	5.9	38.0	2.2	1.64	75	0.58	0.83
	40	2	8.0	61.0	4.4	3.28	83	0.89	0.75
	60	4	9.0	60.0	3.3	2.46	73	0.58	0.79
	60	2	10.4	96.0	6.6	5.0	91	0.82	0.79
<b>L120-190</b>	60	4	9.0	60.0	3.3	2.46	73	0.58	0.79
	60	2	10.4	96.0	6.6	5.0	91	0.82	0.79
	80	4	8.2	47.0	4.3	3.21	87	0.69	0.75
	80	2	13.3	120.0	8.8	6.6	92	0.83	0.81
<b>L120-420</b>	100	4	9.8	68.0	5.4	4.0	87	0.73	0.75
	100	2	16.9	133.0	10.7	8.0	86	0.84	0.73
	150	4	19.5	130.0	8.3	6.2	80	0.61	0.71
	150	2	24.6	197.0	16.2	12.1	85	0.85	0.79

Note 1: Full load is defined as 20% of rated motor torque. For 40% of rated motor torque please consult factory.

## L120 actuators

400 volts, three-phase, 50 Hz

Actuator Model	Motor Size (ft-lb)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor
					(hp)	(kW)			
<b>L120-10</b>	3	4	1.4	4.4	0.16	0.11	36	0.52	0.86
	5	8	1.9	4.5	0.14	0.10	23	0.29	0.58
	5	4	2.0	6.0	0.27	0.20	35	0.48	0.89
	5	2	1.6	10.0	0.55	0.41	61	0.64	0.88
	7.5	4	1.8	6.0	0.44	0.30	54	0.52	0.86
	7.5	2	2.4	13.0	0.80	0.60	69	0.57	0.86
<b>L120-20</b>	7.5	4	1.8	6.0	0.40	0.30	54	0.52	0.86
	7.5	2	2.4	13.0	0.80	0.60	69	0.57	0.86
	10	8	3.0	6.5	0.28	0.20	37	0.33	0.56
	10	4	3.0	10.0	0.55	0.41	60	0.43	0.85
	10	2	3.5	17.0	1.1	0.80	58	0.58	0.87
	15	4	3.0	15.0	0.80	0.60	56	0.48	0.84
	15	2	4.1	25.5	1.60	1.20	70	0.65	0.87
<b>L120-40</b>	15	4	3.0	15.0	0.80	0.60	56	0.48	0.84
	15	2	4.1	25.0	1.6	1.20	70	0.65	0.87
	25	4	4.8	21.0	1.3	1.0	70	0.65	0.87
	25	2	6.5	29.0	2.7	2.0	78	0.65	0.87
<b>L120-85</b>	25	4	5.4	33.0	1.4	1.1	60	0.53	0.72
	25	2	4.8	33.0	2.7	2.0	71	0.79	0.85
	40	4	6.10	39.0	2.2	1.64	75	0.58	0.83
	40	2	8.8	63.0	4.4	3.28	83	0.89	0.75
	60	4	11.0	57.0	3.3	2.46	73	0.58	0.79
	60	2	10.1	101.0	6.7	5.0	91	0.82	0.79
<b>L120-190</b>	60	4	11.0	57.0	3.3	2.46	73	0.58	0.79
	60	2	10.1	101.0	6.7	5.0	91	0.82	0.79
	80	4	8.4	48.0	4.3	3.21	87	0.69	0.75
	80	2	13.0	127.0	8.9	6.6	92	0.83	0.81
<b>L120-420</b>	100	4	9.1	71.3	5.4	4.0	87	0.73	0.75
	100	2	16.1	126.0	10.7	8.0	86	0.84	0.73
	150	4	20.2	120.0	8.3	6.2	79	0.56	0.71
	150	2	23.4	187.0	16.2	12.1	70	0.86	0.74

Note 1: Full load is defined as 20% of rated motor torque. For 40% of rated motor torque please consult factory.

## L120 actuators

415 volts, three-phase, 50 Hz

Actuator Model	Motor Size (ft-lb)	Poles	Full Load Current <sup>1</sup> (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor
					(hp)	(kW)			
<b>L120-10</b>	3	4	1.9	5.0	0.16	0.11	32	0.50	0.96
	5	8	2.2	4.5	0.14	0.10	20	0.27	0.59
	5	4	2.2	6.0	0.27	0.20	32	0.46	0.89
	5	2	1.8	10.0	0.55	0.41	61	0.64	0.88
	7.5	4	2.0	6.5	0.44	0.30	50	0.50	0.87
	7.5	2	2.7	14.0	0.80	0.60	62	0.50	0.87
<b>L120-20</b>	7.5	4	2.0	6.5	0.40	0.30	50	0.50	0.87
	7.5	2	2.7	14.0	0.80	0.60	62	0.50	0.87
	10	8	3.5	6.5	0.28	0.20	35	0.30	0.53
	10	4	3.1	11.0	0.55	0.41	58	0.40	0.84
	10	2	4.0	18.0	1.1	0.80	55	0.50	0.87
	15	4	4.0	16.0	0.80	0.60	52	0.42	0.85
	15	2	5.0	27.0	1.6	1.2	67	0.58	0.88
<b>L120-40</b>	15	4	4.0	16.0	0.80	0.60	52	0.42	0.85
	15	2	5.0	27.0	1.6	1.2	67	0.58	0.88
	25	4	5.0	21.0	1.3	1.0	67	0.58	0.88
	25	2	7.0	30.0	2.7	2.0	79	0.58	0.88
<b>L120-85</b>	25	4	5.4	33.0	1.4	1.1	56	0.53	0.72
	25	2	4.8	33.0	2.7	2.0	72	0.79	0.85
	40	4	5.4	34.8	2.2	1.64	75	0.58	0.83
	40	2	7.3	56.0	4.4	3.28	83	0.89	0.75
	60	4	8.2	59.5	3.3	2.46	73	0.58	0.79
	60	2	10.5	110.0	6.7	5.0	91	0.82	0.79
<b>L120-190</b>	60	4	8.2	59.5	3.3	2.46	73	0.58	0.79
	60	2	10.5	110.0	6.7	5.0	91	0.82	0.79
	80	4	7.5	43.0	4.3	3.21	87	0.69	0.75
	80	2	13.7	110.0	8.8	6.6	92	0.83	0.81
<b>L120-420</b>	100	4	8.8	69.0	5.4	4.0	87	0.73	0.75
	100	2	15.5	122.0	10.7	8.0	86	0.84	0.73
	150	4	18.0	103.0	8.3	6.2	80	0.61	0.71
	150	2	22.5	180.0	16.2	12.1	70	0.86	0.74

Note 1: Full load is defined as 20% of rated motor torque. For 40% of rated motor torque please consult factory.

## L120 actuators

115 volts, single-phase, 60 Hz

230 volts, single-phase, 60 Hz

220 volts, single-phase, 50 Hz

Actuator Model	Motor Size (ft-lb)	Full Load Current (A)	Locked Rotor Current (A)	Rated Power Output		Efficiency at Full Load <sup>1</sup> (%)	Power Factor at Full Load <sup>1</sup>	Power Factor at Locked Rotor
				(hp)	(kW)			
<b>115 volts, single-phase, 60 Hz</b>								
L120-20, 40	5	9.6	36	.33	.25	39	.57	.95
	10	12.3	57	.66	.49	54	.66	.89
<b>230 volts, single-phase, 60 Hz</b>								
L120-10, 20	5	4.8	18	.33	.25	39	.57	.95
	10	6.1	28.5	.66	.49	54	.66	.89
<b>220 volts, single-phase, 50 Hz</b>								
L120-10, 20	5	4.8	18	.28	.21	32	.57	.95
	10	6.1	28.5	.56	.42	45	.66	.89

Note 1: Full load is defined as 20% of rated motor torque. For 40% of rated motor torque please consult factory.



**Flowserve Corporation  
Flow Control**

**United States**

Flowserve Limitorque  
5114 Woodall Road,  
P.O. Box 11318  
Lynchburg, VA 24506-1318  
Phone: 434-528-4400  
Facsimile: 434-845-9736

**England**

Flowserve Limitorque  
Euro House  
Abex Road  
Newbury  
Berkshire, RG14 5EY  
United Kingdom  
Phone: 44-1-635-46999  
Facsimile: 44-1-635-36034

**Japan**

Limitorque – Nippon Gear Co., Ltd.  
Asahi-Seimei Bldg. 4th Floor  
1-11-11 Kita-Saiwai, Nishi-Ku  
Yokohama-Shi, (220-0004)  
Japan  
Phone: 81-45-326-2065  
Facsimile: 81-45-320-5962

**Canada**

Flowserve Limitorque  
120 Vinyl Court  
Woodbridge, Ontario L4L 4A3  
Canada  
Phone 905-856-4565  
Fax 905-856-7905

**Singapore**

Limitorque Asia, Pte., Ltd.  
12, Tuas Avenue 20  
Singapore 638824  
Phone: 65-6868-4628  
Facsimile: 65-6862-4940

*To find your local Flowserve representative,  
visit [www.flowserve.com](http://www.flowserve.com) or call USA 1 800 225 6989*

FCD LMENPS2331-00 Printed in USA. (Replaces 130-50001)

Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can (and often does) provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Operation Maintenance (IOM) instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

© 2007 Flowserve Corporation, Irving, Texas, USA. Flowserve is a registered trademark of Flowserve Corporation.